


The
Pragmatic
Programmers

Java by Comparison

Become a Java Craftsman
in 70 Examples

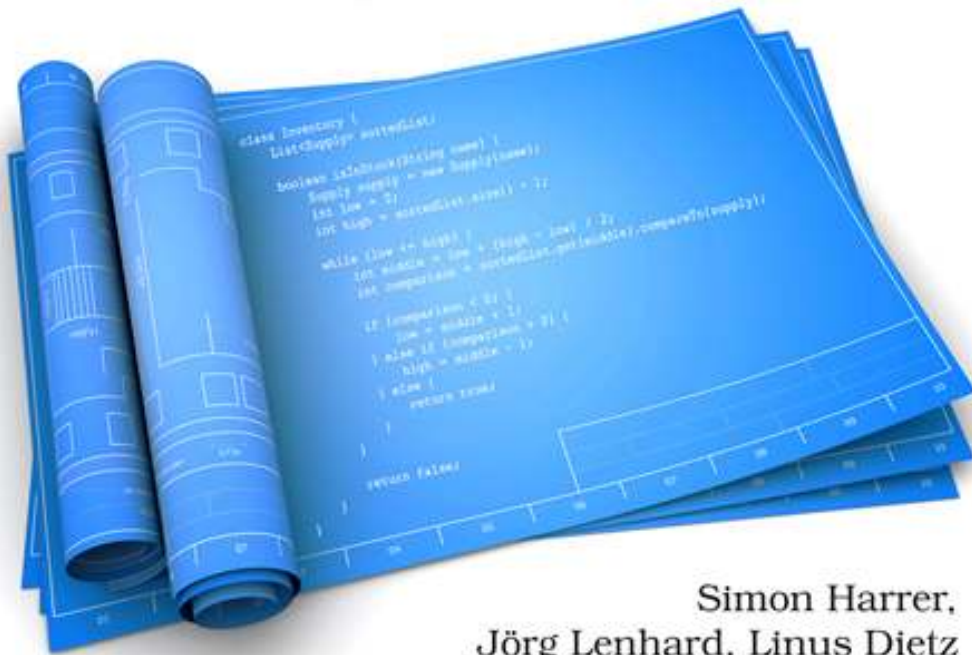

Simon Harrer,
Jörg Lenhard, Linus Dietz
Foreword by Venkat Subramaniam
Edited by Andrea Stewart

15.05.2018

Nürnberg / HackerkegelN / SCC @ DATEV

Die Geschichte(n) unseres Buchs

Dr. **Simon** Harrer
Linus Dietz

INNOQ





Dr. Simon Harrer

Senior Consultant
INNOQ Deutschland GmbH

Simon wirbt für
passende Architekturen



Linus Dietz

Wissenschaftlicher Mitarbeiter & Doktorand
Technische Universität München

Linus forscht über
Empfehlungsdienste für Reisende

Agenda

- 1. Geschichte(n) des Buches (30 min)**
- 2. Pause (15 min)**
- 3. Comparison Jeopardy (30+ min)**
- 4. Bier (bis zum bitteren Ende)**

2011



Typische Lehrveranstaltungen

Theoretische Vorlesung

Plenarübung

Hausaufgaben

Schriftliche Klausur

Aufgabenstellung



Lösung




Note



**Wie bringt man anderen bei
sauberen Code
zu schreiben?**

1. **Code Reviews** interaktiv miterleben
2. **Code Reviews** schriftlich bekommen
3. **Code Reviews** selbst durchführen

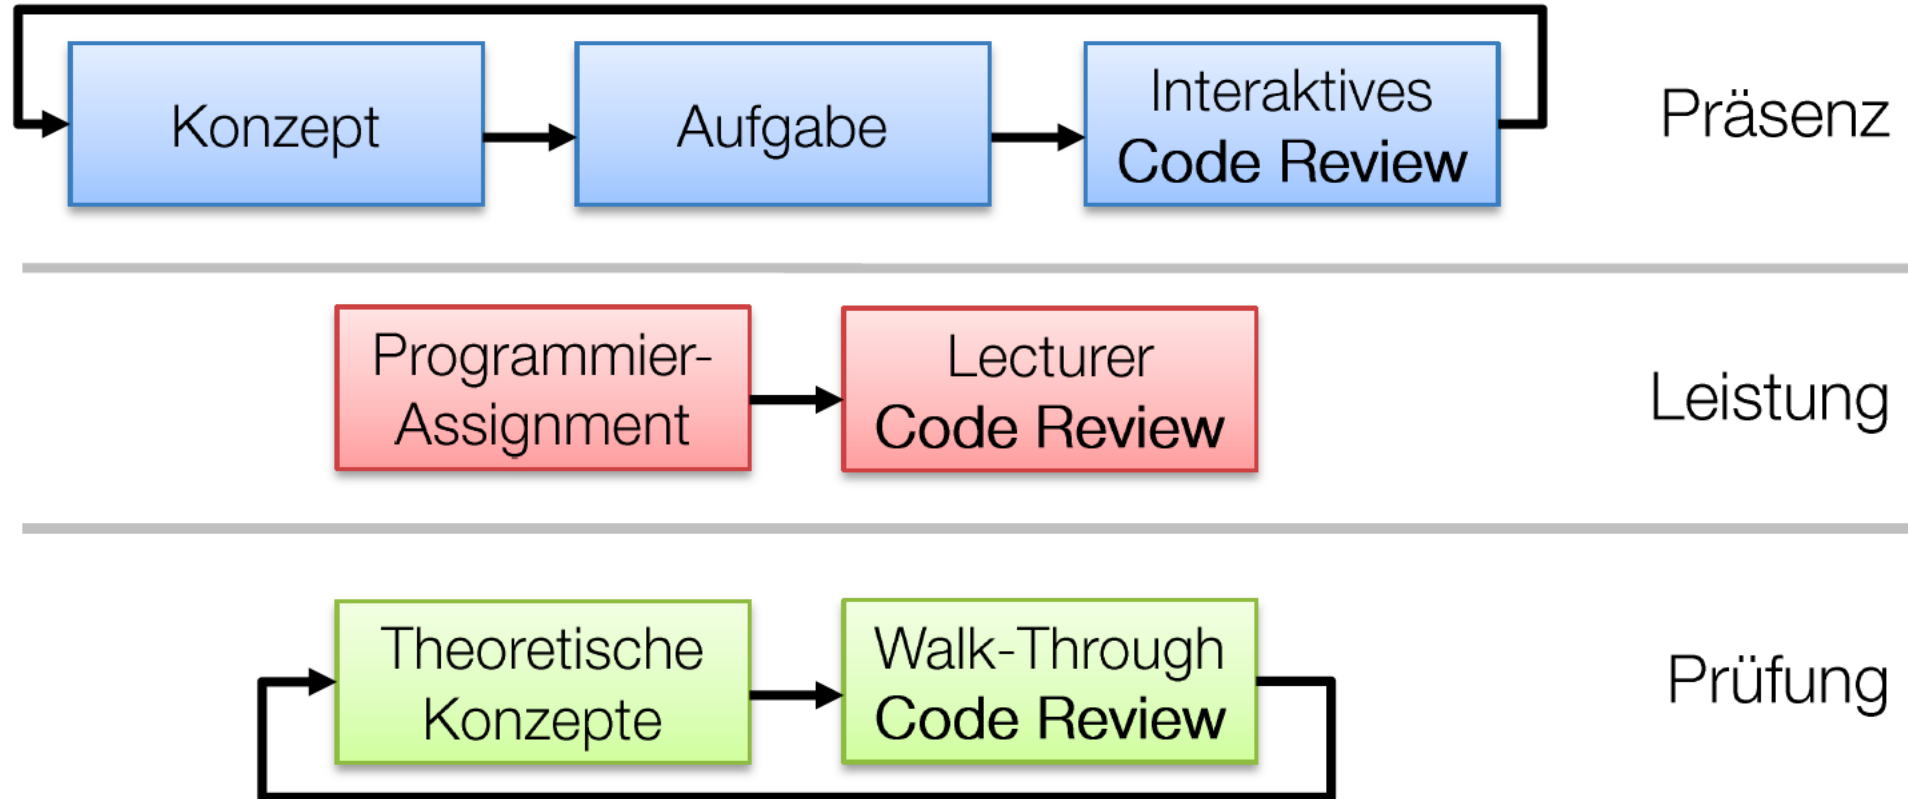

16 – Wurde der Code ausreichend dokumentiert?

17 Ja

18
19 – Code Conventions eingehalten?

20 Nein. Ihr solltet Klassen- und VariablenNamen in CamelCase schreiben. Im Fall von Findspots ist das nicht der Fall. Klassennamen sollten auch generell Nomen sein. Also in diesem Fall `SpotFinder`.

21
22
23 **##Code**

24
25 – Ressourcen korrekt geschlossen?

26 Ja

27
28 – Exceptions korrekt behandelt (inkl. weiterwerfen mit Cause)?

29 Nein. Wenn der Validator fehlschlaegt darf das Programm nicht mit `System.exit()` beendet werden! Stattdessen soll eine `TokenfinderException` mit einer Nachricht geworfen werden. Fehler sollten frueh geworfen werden. Das bedeutet, dass sobald im `Validator` ein Check fehlschlaegt, sofort eine passende Exception geworfen werden sollte und der Rest nicht mehr ueberprueft werden muss.

30 Ihr verwendet die `javax.xml.bind.ValidationException`. Das ist schlechte Praxix, da sich diese auf Fehler im Kontext von XMLvalidierung bezieht. Hier haettet ihr einfach die `TokenFinderException` verwenden koennen. Weiterhin habt ihr im `Validator` die Methoden von `java.nio` noch einmal in eigene gleichnamigen Methoden gesteckt nur um jeweils eine `javax.xml.ValidationException` werfen zu koennen. Das ist sehr viel unnoetiger und falscher Code, weil diese Methoden ja ihre eigenen Exceptiontypen (meist `IOException`) werfen, die ihr dann jeweils fangen sollt.

31 Was auch unschoen ist, dass ihr in `SimpleTokenFinder.search()` #55–74 einen `try-catch-block` habt, der eine `TokenFinderException` faengt. Diese sollte einfach durch throws nach oben weitergegeben werden anstatt die Nachricht auszugeben.

32
33
34 – Wird die Java NIO Bibliothek verwendet?

35 Ja


36
37 – Wurde die Aufgabe sinnvoll (bspw. in mehrere Klassen) strukturiert?

38 Ja, alledings haben eure Methoden teilweise noch viele Einrueckungen. Da solltet ihr noch etwas mehr

Typische Gruppenstrategien

- Jeder macht ca. gleich viel
- Zwei arbeiten zusammen als Team, einer fällt raus
- Einer macht fast alles, einer kommt da noch mit, der dritte fällt raus
- Einer macht alles, zwei fast nichts

Arbeitsverteilung

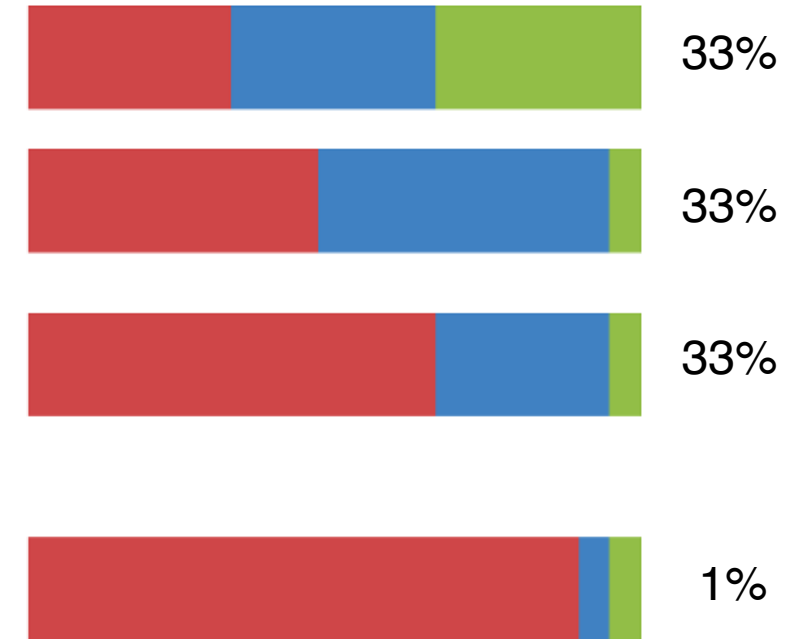

**Es gibt einen hohen Zusammenhang zwischen Endnote und
eingesetztem Aufwand!**





Common Stuff

- Warnings still in the Code
- FIXME and TODO in the Code
- Commented out code
- Do not use `System.exit()`

Issues

- Always use braces `if(CONDITION) { STATEMENT; }`, never `if(condition) STATEMENT;` (see <http://embeddedgurus.com/barr-code/2014/03/apples-gotofail-ssl-security-bug-was-easily-preventable/>)
- Do never catch `Exception` and `NullPointerException`, except you have an extremely good reason for it
- Instead of `if (CONDITION) { return true; } else { return false; }` simply write `return CONDITION;`
- Avoid unnecessary documentation such as `// ... return true ...` to document `return true;`. Focus on the important things instead.
- Do not document your name in the classes to avoid marking bias
- Use `final` as much as possible for your fields - this simplifies your code tremendously

Siegerehrung

Zum ersten Mal seit 6 Jahren AJP hat ein Team
die volle Punktzahl erreicht. Es ist möglich.

Herzlichen Glückwunsch
Gruppe ?



Siegerehrung

Zum ersten Mal seit 6 Jahren AJP hat ein Team
die volle Punktzahl erreicht. Es ist möglich.

Herzlichen Glückwunsch
Gruppe ?



In den letzten 6 Jahren ...

... **500+ Assignments** korrigiert

... **1.000.000+ Java Codezeilen** gelesen

... **1000de der gleichen Fehlern** immer wieder angemerkt

... gelernt andere zu überzeugen “Clean Code” zu schreiben

... neue Herausforderungen gesucht.

INNOQ

SAP

TUM

War's das jetzt?

Common Stuff

- Warnings still in the Code
- FIXME and TODO in the Code
- Commented out code
- Do not use `System.exit()`

Issues

- Always use braces `if(CONDITON) { STATEMENT; }`, never `if(condition) STATEMENT;` (see <http://embeddedgurus.com/barr-code/2014/03/apples-gotofail-ssl-security-bug-was-easily-preventable/>)
- Do never catch `Exception` and `NullPointerException`, except you have an extremely good reason for it
- Instead of `if (CONDITION) { return true; } else { return false; }` simply write `return CONDITION;`
- Avoid unnecessary documentation such as `// ... return true ...` to document `return true;`. Focus on the important things instead.
- Do not document your name in the classes to avoid marking bias
- Use `final` as much as possible for your fields - this simplifies your code tremendously

Na klar!

Actionable Name

Favor Format Over Concatenation

Bad Code

```
1 class SearchResult {
2     Path file;
3     int lineNumber, startIndex;
4     String token;
5
6     void print() {
7         System.out.println(file + ":[\" + lineNumber + \";\"
8             + startIndex + \"-\" + (startIndex +
9             token.length() - 1) + \"]> \"
10            + token + System.lineSeparator());
11     };
12 }
```

The problem with this code is that it is *very* hard to see how the output will look like.

Because there are so many plusses, quotes and spaces that obfuscate the code it takes longer to read and the chance of making mistakes is higher. Additionally, performing inline computations like summing ints is not really acceptable any more as the plus operator has different semantics in the very same line what makes it ever harder to read for us.

Problem Description

```
1 class SearchResult {
2     Path file;
3     int lineNumber, startIndex;
4     String token;
5
6     void print() {
7         System.out.printf(\"%s:[%d;%d-%d]> %s\\n\",
8             file,
9             lineNumber,
10            startIndex,
11            startIndex + token.length() - 1,
12            token);
13     };
14 }
```

Better Code

By using `System.out.printf()` (or `String.format()` for working with Strings without printing them) we achieve enhanced separation of syntax (how the String is printed) and semantics (which data is used for printing). Furthermore, it is more acceptable to make inline computations, as we can format the code such that each parameter is in its own line.


On a side note it should be mentioned that this way of formatting Strings is very common in most imperative programming languages and works the very same way in C/C++ and other programming languages.


Solution Description

Java by Comparison

A Software Craftsman's First Book

Simon Harrer and Linus Dietz

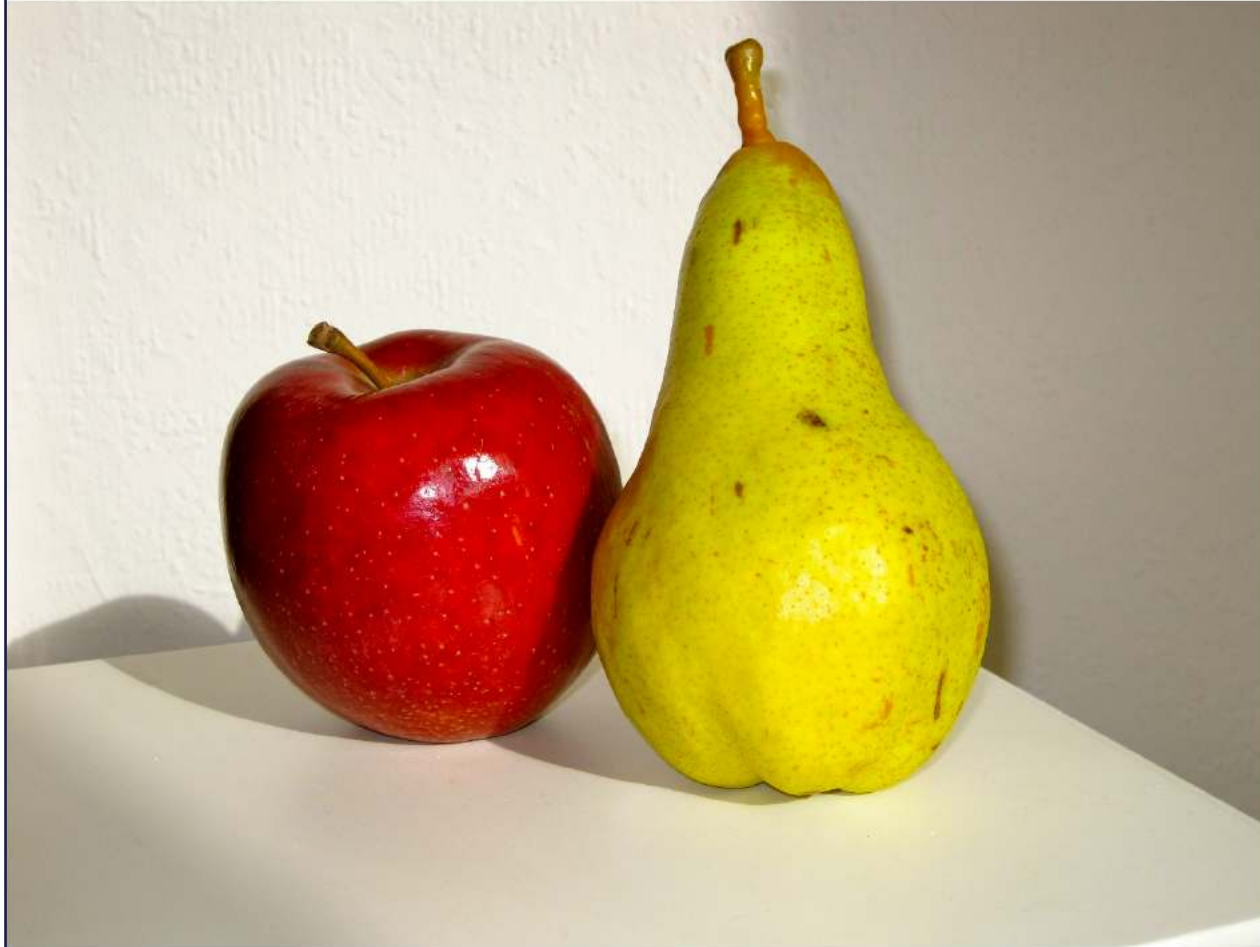

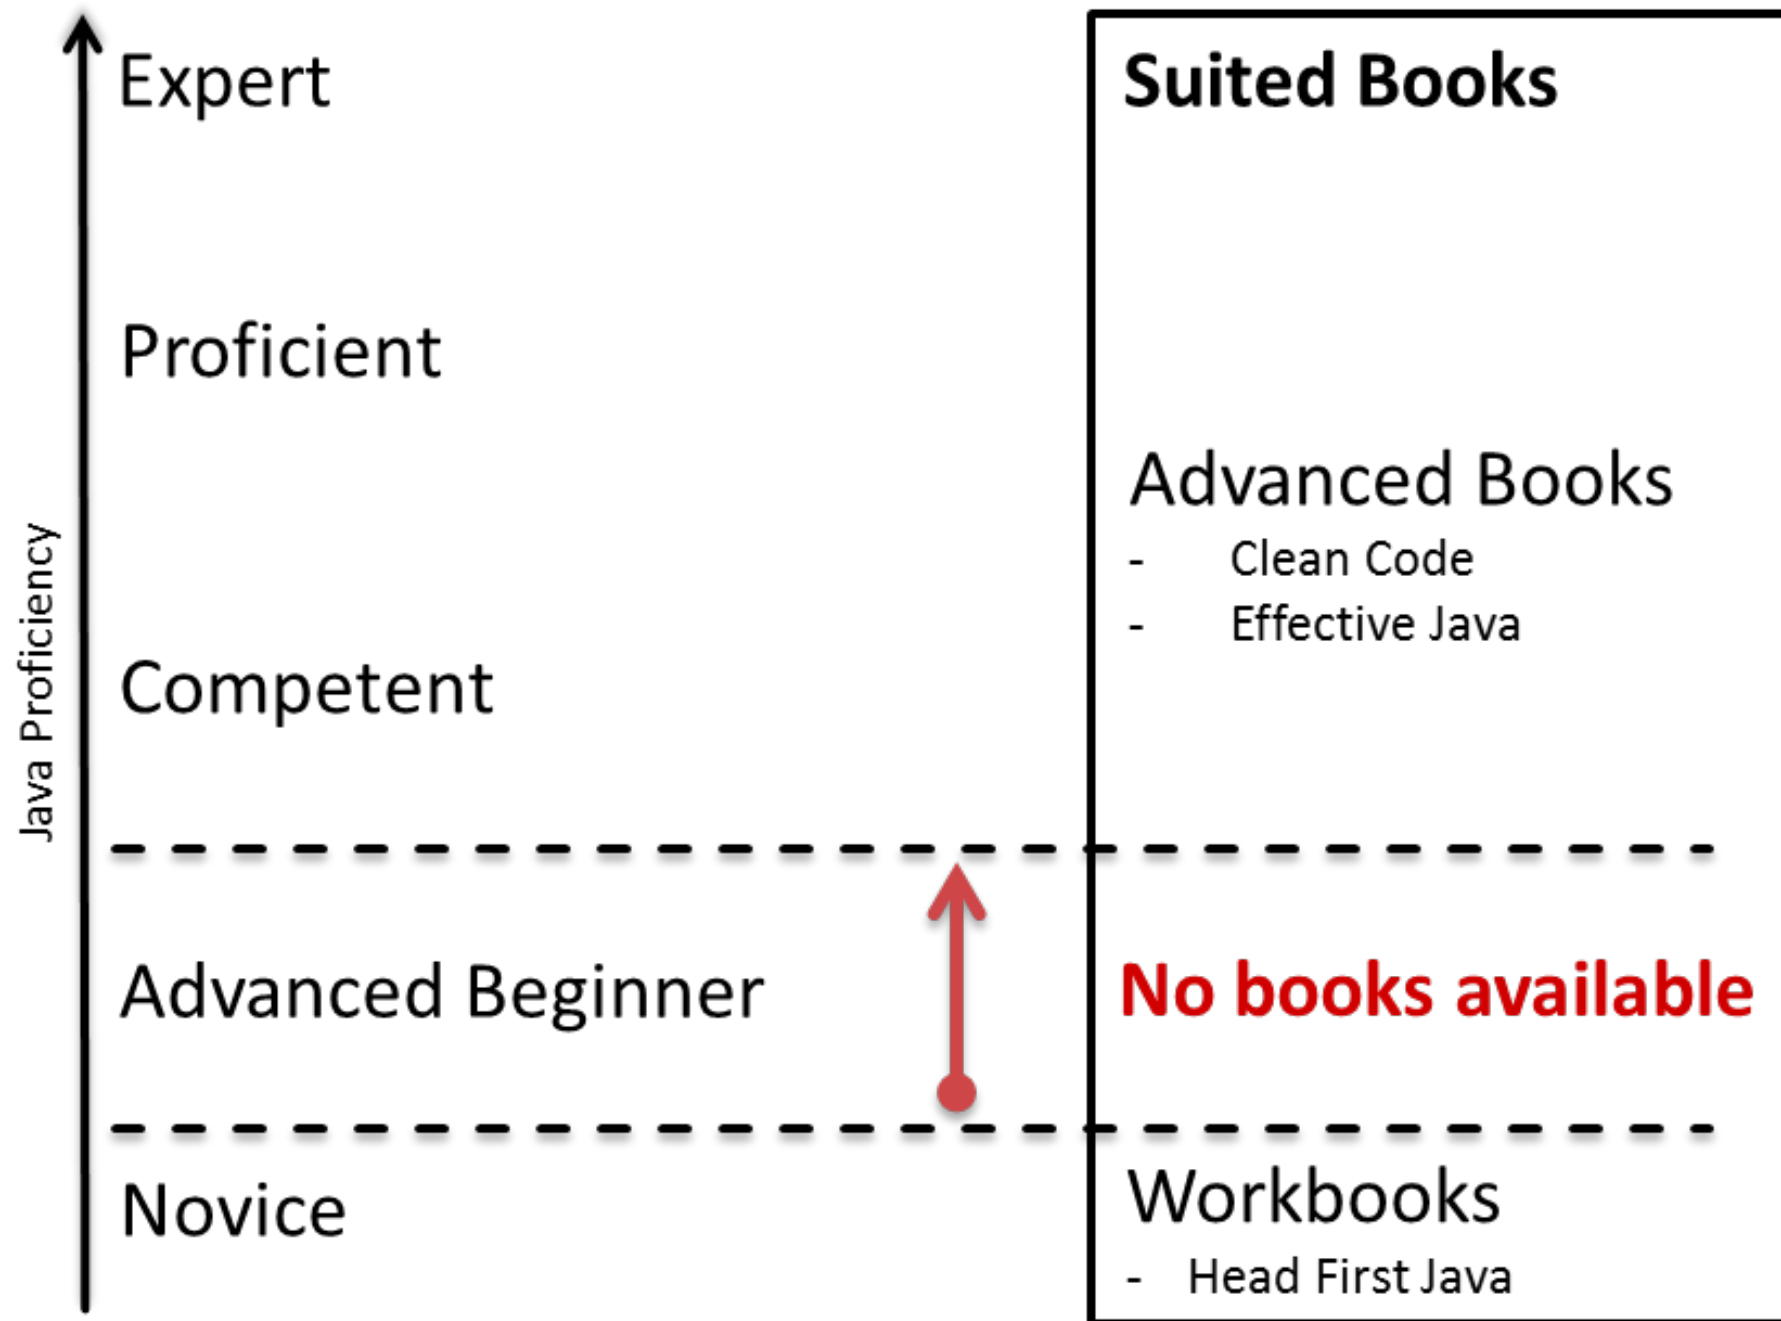




...a ut eu. Ad sapientia eu. ...
...e, voluptas voluptas ...
...ariatur. Magna, in a. ...
...molit adipiscit ...
Duis excepteur sint ut, conetur, ...
incididunt et ad ea occaecat ...
ipsum non. Adipiscing ...
velit ut in, velit quis id. Tunc ...
Nulla deserunt amet quis ea conetur ...
enim sed ea eu conetur ut, in ...
pariatur in ea dolor velit, excepteur ...
tempor velit, adipiscing, excepteur ...
ipsum conetur dolor non occaecat ...
Anim laboris ullamco velit tempor velit ...
culpa deserunt sint elit. Ullamco ...
commodo elit fugiat magna occaecat ...
Esse ea esse.

[Handwritten signature]

Signature

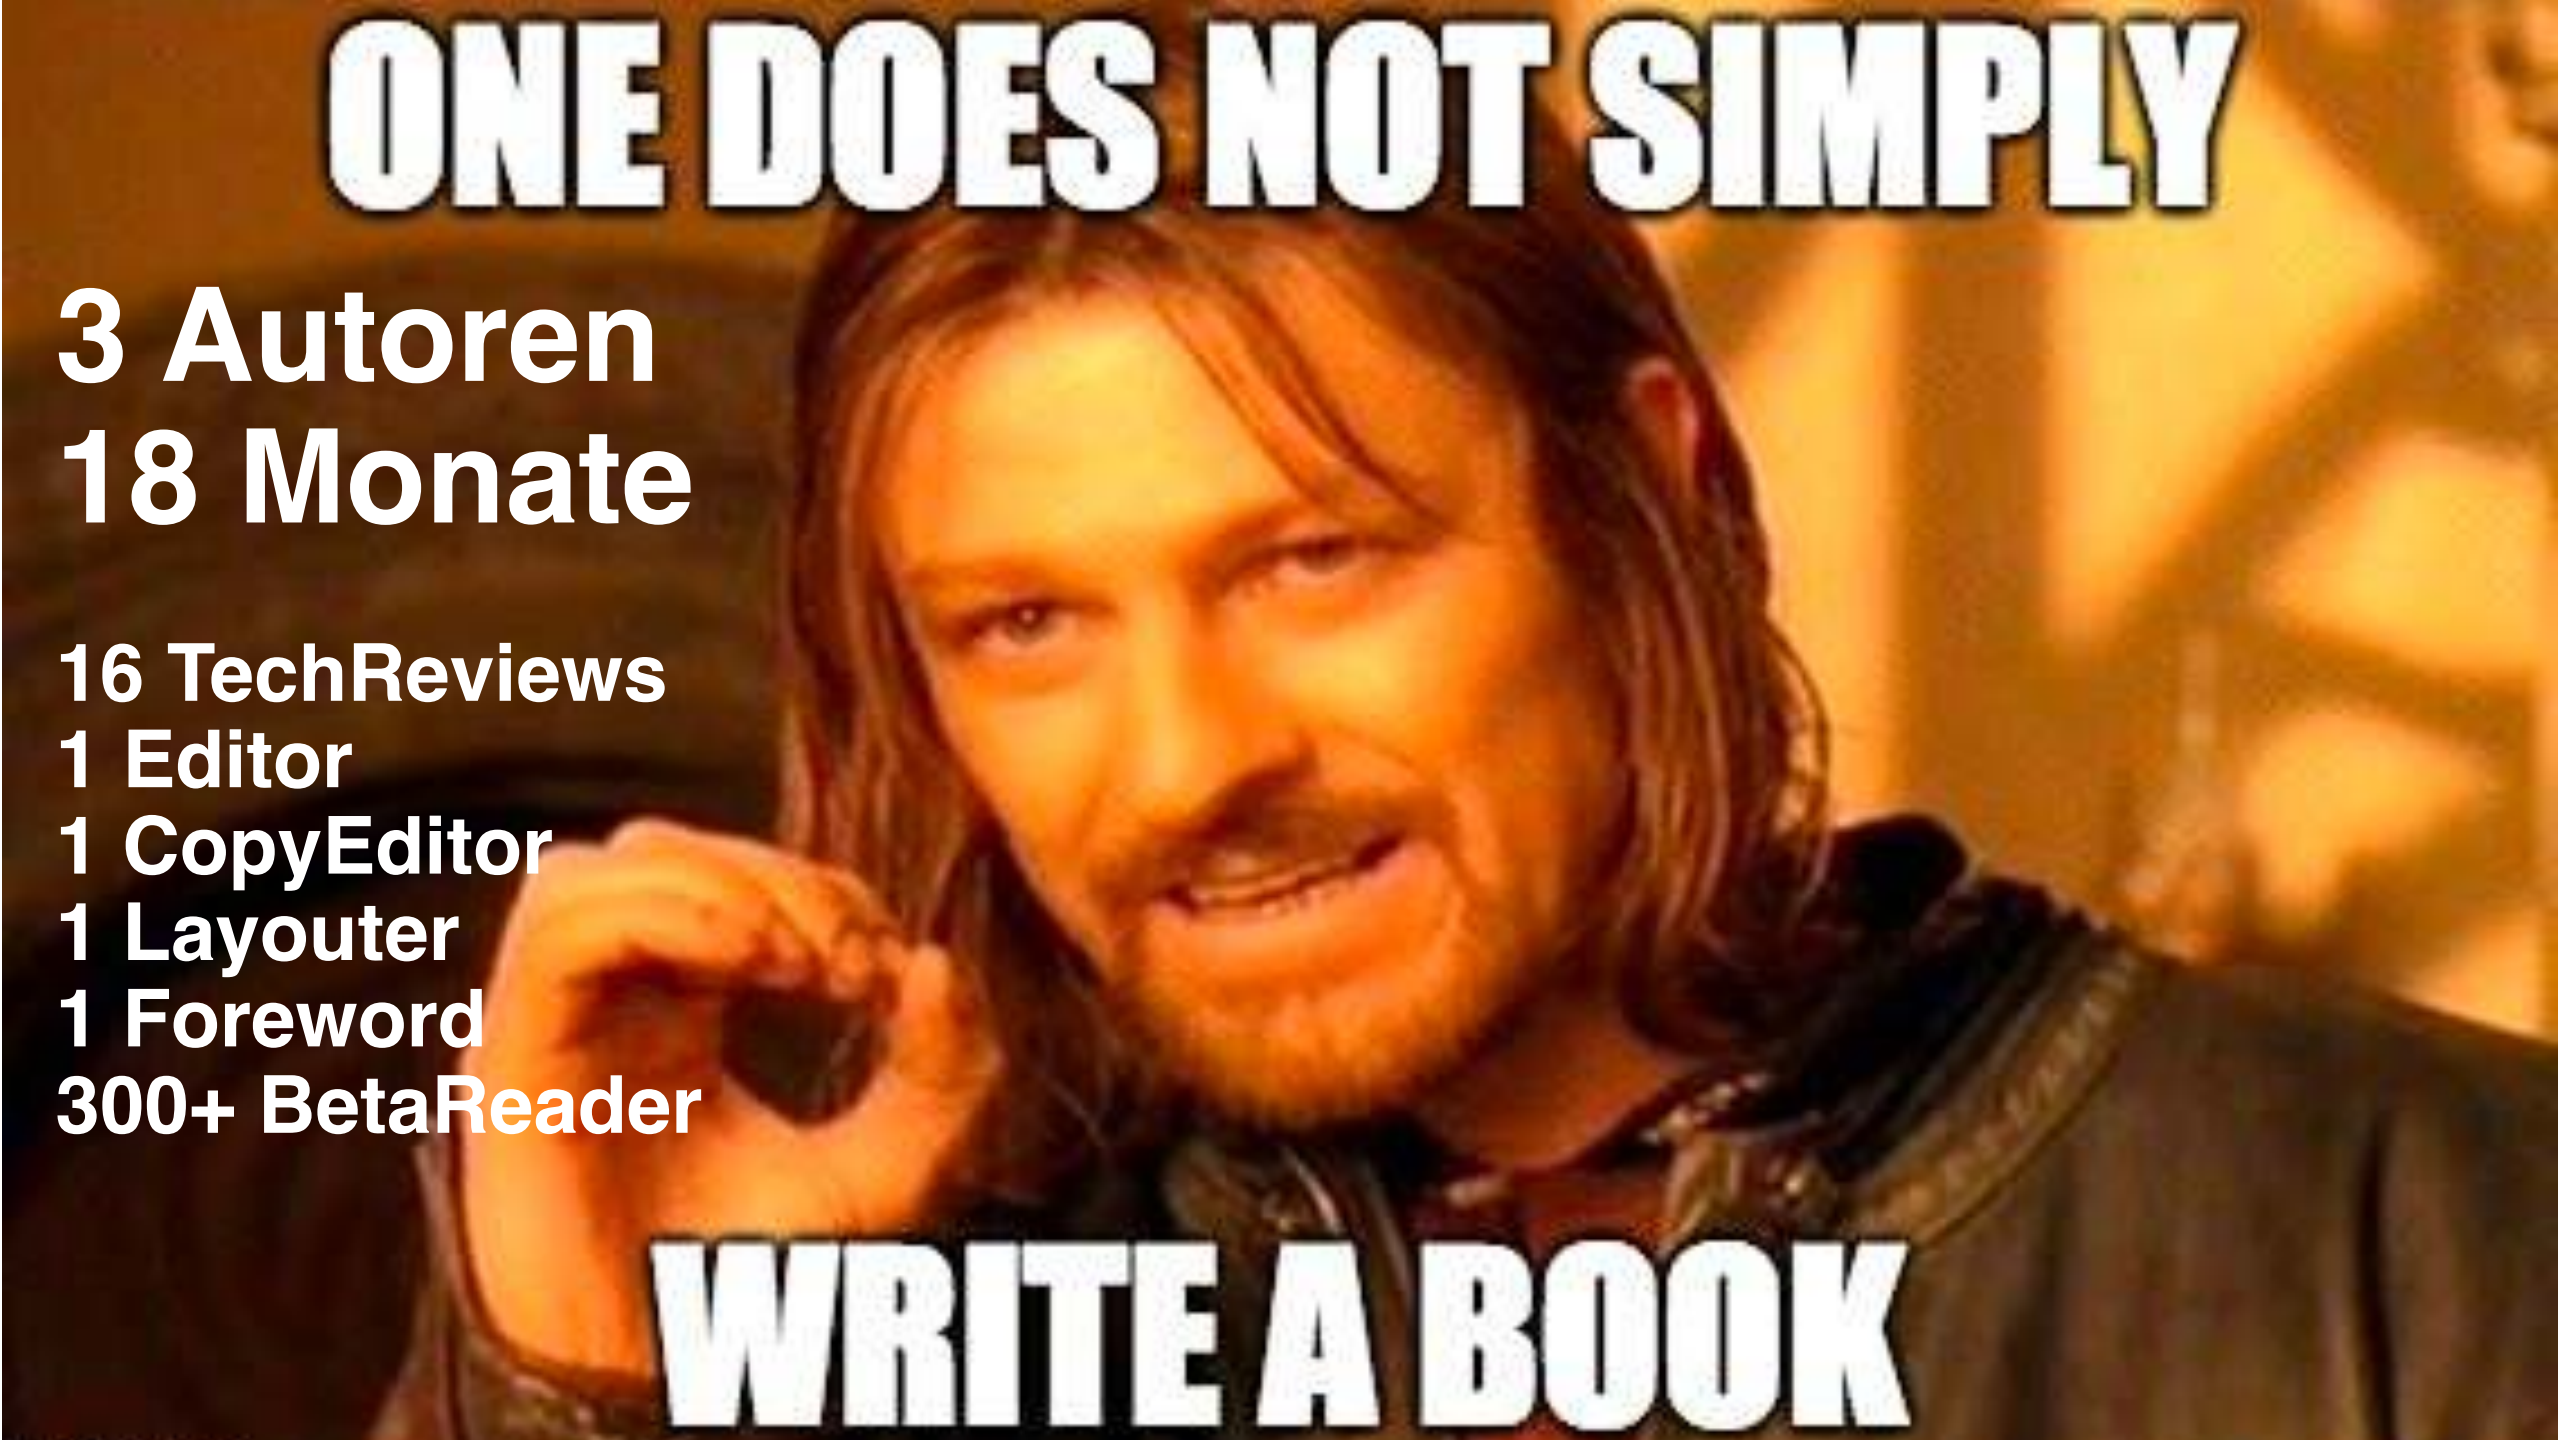

ONE DOES NOT SIMPLY

3 Autoren
18 Monate

16 TechReviews
1 Editor
1 CopyEditor
1 Layouter
1 Foreword
300+ BetaReader

WRITE A BOOK

Favor Format Over Concatenation

```
class Mission {
    Logbook logbook;
    LocalDate start;

    void update(String author, String message) {
        LocalDate today = LocalDate.now();
        String month = String.valueOf(today.getMonthValue());
        String formattedMonth = month.length() < 2 ? "0" + month : month;
        String entry = author.toUpperCase() + ": [" + formattedMonth + "-" +
            today.getDayOfMonth() + "-" + today.getYear() + "](Day " +
            (ChronoUnit.DAYS.between(start, today) + 1) + ")> " +
            message + System.lineSeparator();
        logbook.write(entry);
    }
}
```

Understandability and readability don't just matter in your code—they're also important for the output your code produces.

If you have to build large strings, you can use format strings to make them more readable.

Here, we're revisiting the log book we already mentioned in [Avoid NullPointerException in Conditionals, on page 10](#). The problem is that it's quite hard to see what the output will actually look like. There are multiple String variables, some of them using Java's in-line notation.

The code isn't really complex. There's no deep nesting, no conditional branching, and even the names of variables and methods are meaningful. Despite all this, it's comparably hard to read. The number of plusses, quotes, and spaces obfuscates the actual processing going on (humans are generally better at understanding words in a natural language than combinations of symbols). This makes the code harder to read and increases the chance of making mistakes when writing it.

Additionally, performing in-line computations like summing int values adds to the confusion, as the + operator has different semantics when it comes to Strings and ints. Using it with different semantics in the very same line makes it even harder to maintain an overview of what's happening. Don't do this!

We can trim this down a lot. Take a look at the following code:

```
class Mission {
    Logbook logbook;
    LocalDate start;

    void update(String author, String message) {
        final LocalDate today = LocalDate.now();
        String entry = String.format("%S: [%tm-%<te-%<tY](Day %d)> %s%n",
            author, today,
            ChronoUnit.DAYS.between(start, today) + 1, message);
        logbook.write(entry);
    }
}
```

Format strings help to overcome this issue, and they're available in practically any contemporary programming language—not just in Java. The key lies in separating the layout of a String (*how* it is printed) from the data (*what* is being printed). Format strings define a coherent String in a single block using special placeholder characters, marked by %.

Format methods, such as String.format(), or System.out.printf(), accept data using placeholder characters in the order in which they're listed after the String.

In our example here, %S converts an object into an upper case String using its toString() method. The parameter author will be processed this way. The date variable today serves as data for %tm, the month, %te the day of the month, and %tY, the year. The additional character < makes sure that all three placeholders read the same input data. %d processes a decimal value and %s accepts a String. Finally, %n is the symbol for a line break.

The actual data is listed in a nicely formatted fashion after the String layout. This makes it a little more acceptable to perform in-line computations, as we can use one line for each parameter. Point taken that it's not so easy to see what "%S: [%tm-%<te-%<tY](Day %d)> %s%n" will print in the end. But it's a well-documented standard³ and actually a good alternative to the cluttered code from the problem—for large strings we recommend StringTemplate,⁴ a powerful template engine.

Consider documenting the formatted string with a few examples similar to [Document Using Examples, on page 48](#) so that the next developer reading your code doesn't have to look up how %S or any other special formatting syntax behaves to know what the resulting string will be.

1. Start Cleaning Up

2. Level Up Your Code Style

3. Use Comments Wisely

4. Name Things Right

5. Prepare for Things Going Wrong

6. Assert Things Going Right

7. Design Your Objects

8. Let Your Data Flow

9. Prepare for the Real World



6 Ergebnisse für "java by comparison"

Ergebnisse anzeigen für

Fremdsprachige Bücher

Java
Softwareentwicklung
Programmiersprachen & Tools

Alle 3 Kategorien

Filtern nach

Versandoption



Java by Comparison: Become a Java Craftsman in 80 Examples

20. April 2018

von Simon Harrer und Jörg Lenhard

Taschenbuch

EUR 32,54



Lieferung bis Montag, 14. Mai

Andere Angebote

EUR 27,68 (7 gebrauchte und neue Artikel)



Kindle Edition

EUR 21,65

KOSTENFREIE Lieferung

6 Ergebnisse für "java by comparison"

Ergebnisse anzeigen für

Fremdsprachige Bücher

Java
Softwareentwicklung
Programmiersprachen & Tools

Alle 3 Kategorien

Filtern nach

Versandoption



Java by Comparison: Become a Java Craftsman in 80 Examples

20. April 2018

von [Simon Harrer](#) und [Jörg Lenhard](#)

Taschenbuch

EUR 32,54 ✓prime

Lieferung bis Montag, 14. Mai

Andere Angebote

EUR 27,68 (7 gebrauchte und neue Artikel)

★★★★★ 4

Kindle Edition

EUR 21,65

KOSTENFREIE Lieferung

6 Ergebnisse für "java by comparison"

Ergebnisse anzeigen für

Fremdsprachige Bücher

- Java
- Softwareentwicklung
- Programmiersprachen & Tools

Alle 3 Kategorien

Filtern nach

Versandoption



Java by Comparison: Become a Java Craftsman in 80 Examples

20. April 2018

von [Simon Harrer](#) und [Jörg Lenhard](#)

Taschenbuch

EUR 32,54



Lieferung bis Montag, 14. Mai

Andere Angebote

EUR 27,68 (7 gebrauchte und neue Artikel)



Kindle Edition

EUR 21,65

KOSTENFREIE Lieferung

6 Ergebnisse für "java by comparison"

Ergebnisse anzeigen für

Fremdsprachige Bücher

Java
Softwareentwicklung
Programmiersprachen & Tools

Alle 3 Kategorien

Filtern nach

Versandoption



Java by Comparison: Become a Java Craftsman in 80 Examples

20. April 2018

von Simon Harrer und Jörg Lenhard

Taschenbuch

EUR 32,54 ✓prime

Lieferung bis Montag, 14. Mai

Andere Angebote

EUR 27,68 (7 gebrauchte und neue Artikel)

★★★★★ 4

Kindle Edition

EUR 21,65

KOSTENFREIE Lieferung



ZOLL



KREUZLINGEN
EMMISHOFEN

Zoll Grenze Güters

Kreuzlingen-Emmishofen
Kreuzlingenstr. 10a 82 00 - 20 00

Grenzübergang erlaubt
mit anwesender und gültiger Bundeskennzeichen

Warten:

- Grüne Ampel: Weiterfahren
- Rote Ampel: Warten

24h-Service: 058 222 040





Simon Harrer @simonharrer · Apr 27

That's how 40 @pragprog „Java by Comparison“ books and a proud co-author with too little sleep look like. [@Lynyus](http://java.by-comparison.com/cc)



20 23 142



Sarah Mei @sarahmei · Apr 28

Congrats on the book! Unfortunately your editor (I assume) gave it a shitty subtitle, which means I and thousands of others will never buy it.



Simon Harrer @simonharrer

That's how 40 @pragprog „Java by Comparison“ books and a proud co-author with too little sleep look like. [@Lynyus](http://java.by-comparison.com/cc)

59 36 209



Sarah Mei @sarahmei · Apr 28

p.s. that applies to anything using the word “craftsman.” No better way to say PROGRAMMING IS ONLY FOR MEN!

I don't buy the books, I don't go to the events, and I don't hire people who use “craftsmanship” to describe what we do.

23 15 160





Sarah Mei @sarahmei · Apr 28


Using the word craftsmanship to describe programming is a 100% reliable indicator of someone who is blind to the effects of structural oppression.

25 55 227



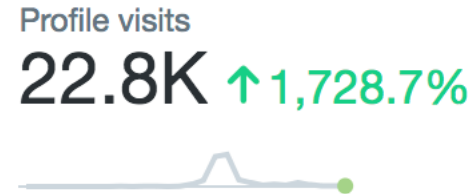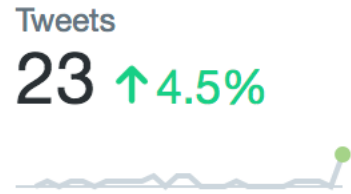

Ein Twitter-Sturm in Zahlen

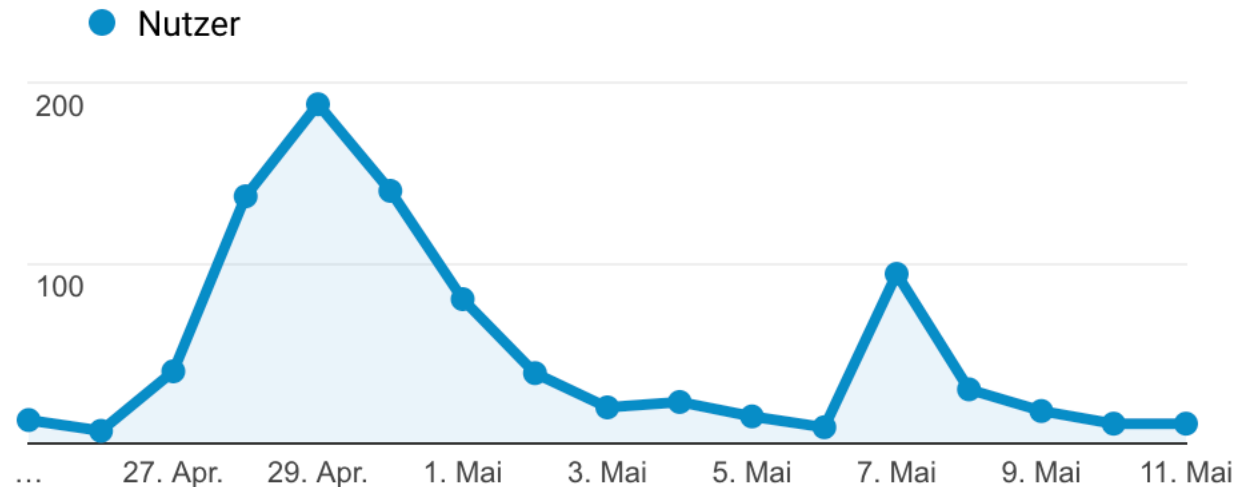



Uncle Bob Martin @unclebobmartin · Apr 30

I just purchased "Java by Comparison"



Prime



Java By Comparison: Become a Java Craftsman in 70 Examples

Write code that's clean, concise, and to the point: code that others will read with pleasure and reuse. Comparing your code to that of expert

amazon.com

7 2 75

Verkaufs- fördernde Tweets



Uncle Bob Martin

@unclebobmartin

Following

“Java by Comparison” by @simonharrer, Jorge Lenhard, and Linus Dietz is a fun romp through 70 rules for writing good clean Java code. Each rule is depicted with a before/after analysis that clearly depicts the smell and solution.



Uncle Bob Martin

@unclebobmartin

Following

Novices should memorize these rules. Experienced programmers should compare them to their own list of rules and make the necessary additions and changes. Masters should nod sagely and pretend that they’ve always known these rules.



Uncle Bob Martin

@unclebobmartin

Following

My only disagreement with the authors is on their usage of braces, and HTML in Javadocs <grin>. Beyond that, the book is full of sound advice for every programmer.

Nachdem der Sturm sich gelegt hat...



Simon Harrer @simonharrer · May 7



"Java by Comparison" is for those who want to learn how to code better. We tried to write inclusively, but in the last few days, we were shown that we can do better. In future, we'll try to improve on that, be it in a potential next edition and also in our everyday conversations.



Craftsman(ship)

- **Wie seht ihr den Begriff?**
- **Was sind/gibt es für euch Alternativen?**
- **Habt ihr euch als Software Craftsmanship Community @ DATEV schon damit auseinander gesetzt?**

**Nach einer kurzen Pause
geht es weiter mit**

Comparison Jeopardy!

Lasset uns spielen!

Comparison Jeopardy

Actionable Name

Bad Code

Problem Description

Better Code

Solution Description

Spielregeln

- Wir zeigen euch einen **Codevergleich**
- **Findet einen Namen** der das “Refactoring” beschreibt
 - Name muss mit einem **Verb** anfangen
- **Beispiele**
 - **Simplify Boolean Expression**
 - **Favor Format Over Concatenation**

Kategorie: Code Style

Avoid Negations

```
class Laboratory {  
    Microscope microscope;  
  
    Result analyze(Sample sample) {  
        if (microscope.isInorganic(sample)) {  
            return Result.INORGANIC;  
        } else {  
            return analyzeOrganic(sample);  
        }  
    }  
  
    private Result analyzeOrganic(Sample sample) {  
        if (!microscope.isHumanoid(sample)) {  
            return Result.ALIEN;  
        } else {  
            return Result.HUMANOID;  
        }  
    }  
}
```

```
class Laboratory {  
    Microscope microscope;  
  
    Result analyze(Sample sample) {  
        if (microscope.isOrganic(sample)) {  
            return analyzeOrganic(sample);  
        } else {  
            return Result.INORGANIC;  
        }  
    }  
  
    private Result analyzeOrganic(Sample sample) {  
        if (microscope.isHumanoid(sample)) {  
            return Result.HUMANOID;  
        } else {  
            return Result.ALIEN;  
        }  
    }  
}
```

Avoid Compute-Intense Operations During Iteration

```
class Inventory {  
    private List<Supply> supplies = new ArrayList<>();  
  
    List<Supply> find(String regex) {  
        List<Supply> result = new LinkedList<>();  
        for (Supply supply : supplies) {  
            if (Pattern.matches(regex, supply.toString())) {  
                result.add(supply);  
            }  
        }  
        return result;  
    }  
}
```

```
class Inventory {  
    private List<Supply> supplies = new ArrayList<>();  
  
    List<Supply> find(String regex) {  
        List<Supply> result = new LinkedList<>();  
        Pattern pattern = Pattern.compile(regex);  
        for (Supply supply : supplies) {  
            if (pattern.matcher(supply.toString()).matches()) {  
                result.add(supply);  
            }  
        }  
        return result;  
    }  
}
```

Kategorie: Kommentare

Document Using Examples

```
class Supply {  
    /**  
     * The code universally identifies a supply.  
     *  
     * It follows a strict format, beginning with an S (for supply), followed  
     * by a five digit inventory number. Next comes a backslash that  
     * separates the country code from the preceding inventory number. This  
     * country code must be exactly two capital letters standing for one of  
     * the participating nations (US, EU, RU, CN). After that follows a dot  
     * and the actual name of the supply in lowercase letters.  
     */  
    static final Pattern CODE =  
        Pattern.compile("^S\\d{5}\\\\(US|EU|RU|CN)\\. [a-z]+$");  
}
```

```
class Supply {  
    /**  
     * The expression universally identifies a supply code.  
     *  
     * Format: "S<inventory-number>\\<COUNTRY-CODE>.<name>"  
     *  
     * Valid examples: "S12345\\US.pasta", "S08342\\CN.wrench",  
     * "S88888\\EU.laptop", "S12233\\RU.brush"  
     *  
     * Invalid examples:  
     * "R12345\\RU.fuel"      (Resource, not supply)  
     * "S1234\\US.light"      (Need five digits)  
     * "S01234\\AI.coconut"   (Wrong country code. Use US, EU, RU, or CN)  
     * " S88888\\EU.laptop "  (Trailing whitespaces)  
     */  
    static final Pattern SUPPLY_CODE =  
        Pattern.compile("^S\\d{5}\\\\(US|EU|RU|CN)\\. [a-z]+$");  
}
```

Kategorie: Fehler

Fail Fast

```
class CruiseControl {
    static final double SPEED_OF_LIGHT_KMH = 1079252850;
    static final double SPEED_LIMIT = SPEED_OF_LIGHT_KMH;

    private double targetSpeedKmh;

    void setTargetSpeedKmh(double speedKmh) {
        if (speedKmh < 0) {
            throw new IllegalArgumentException();
        } else if (speedKmh <= SPEED_LIMIT) {
            targetSpeedKmh = speedKmh;
        } else {
            throw new IllegalArgumentException();
        }
    }
}
```

```
class CruiseControl {
    static final double SPEED_OF_LIGHT_KMH = 1079252850;
    static final double SPEED_LIMIT = SPEED_OF_LIGHT_KMH;

    private double targetSpeedKmh;

    void setTargetSpeedKmh(double speedKmh) {
        if (speedKmh < 0 || speedKmh > SPEED_LIMIT) {
            throw new IllegalArgumentException();
        }

        targetSpeedKmh = speedKmh;
    }
}
```

Expose Cause in Variable

```
class TransmissionParser {
    static Transmission parse(String rawMessage) {
        if (rawMessage != null
            && rawMessage.length() != Transmission.MESSAGE_LENGTH) {
            throw new IllegalArgumentException(
                String.format("Expected %d, but got %d characters in '%s'",
                    Transmission.MESSAGE_LENGTH, rawMessage.length(),
                    rawMessage));
        }

        String rawId = rawMessage.substring(0, Transmission.ID_LENGTH);
        String rawContent = rawMessage.substring(Transmission.ID_LENGTH);
        try {
            int id = Integer.parseInt(rawId);
            String content = rawContent.trim();
            return new Transmission(id, content);
        } catch (NumberFormatException e) {
            throw new IllegalArgumentException(
                String.format("Expected number, but got '%s' in '%s'",
                    rawId, rawMessage), e);
        }
    }
}
```

➤

➤

➤

```
class TransmissionParser {
    static Transmission parse(String rawMessage) {
        if (rawMessage != null
            && rawMessage.length() != Transmission.MESSAGE_LENGTH) {
            throw new MalformedMessageException(
                String.format("Expected %d, but got %d characters",
                    Transmission.MESSAGE_LENGTH, rawMessage.length()),
                rawMessage);
        }

        String rawId = rawMessage.substring(0, Transmission.ID_LENGTH);
        String rawContent = rawMessage.substring(Transmission.ID_LENGTH);
        try {
            int id = Integer.parseInt(rawId);
            String content = rawContent.trim();
            return new Transmission(id, content);
        } catch (NumberFormatException e) {
            throw new MalformedMessageException(
                String.format("Expected number, but got '%s'", rawId),
                rawMessage, e);
        }
    }
}

final class MalformedMessageException extends IllegalArgumentException {
    final String raw;

    MalformedMessageException(String message, String raw) {
        super(String.format("%s in '%s'", message, raw));
        this.raw = raw;
    }

    MalformedMessageException(String message, String raw, Throwable cause) {
        super(String.format("%s in '%s'", message, raw), cause);
        this.raw = raw;
    }
}
```

Kategorie: Testen

Favor Standalone Tests

```
class OxygenTankTest {
    OxygenTank tank;

    @BeforeEach
    void setUp() {
        tank = OxygenTank.withCapacity(10_000);
        tank.fill(5_000);
    }

    @Test
    void depressurizingEmptiesTank() {
        tank.depressurize();

        Assertions.assertTrue(tank.isEmpty());
    }

    @Test
    void completelyFillTankMustBeFull() {
        tank.fillUp();

        Assertions.assertTrue(tank.isFull());
    }
}
```

```
class OxygenTankTest {
    static OxygenTank createHalfFilledTank() {
        OxygenTank tank = OxygenTank.withCapacity(10_000);
        tank.fill(5_000);
        return tank;
    }

    @Test
    void depressurizingEmptiesTank() {
        OxygenTank tank = createHalfFilledTank();

        tank.depressurize();

        Assertions.assertTrue(tank.isEmpty());
    }

    @Test
    void completelyFillTankMustBeFull() {
        OxygenTank tank = createHalfFilledTank();

        tank.fillUp();

        Assertions.assertTrue(tank.isFull());
    }
}
```

Kategorie: OO-Design

Combine State and Behaviour

```
class Hull {
    int holes;
}

class HullRepairUnit {
    void repairHole(Hull hull) {
        if (isIntact(hull)) {
            return;
        }
        hull.holes--;
    }

    boolean isIntact(Hull hull) {
        return hull.holes == 0;
    }
}
```

```
class Hull {
    int holes;

    void repairHole() {
        if (isIntact()) {
            return;
        }
        holes--;
    }

    boolean isIntact() {
        return holes == 0;
    }
}
```

Avoid Leaking References

```
class Inventory {  
    private final List<Supply> supplies;  
    Inventory(List<Supply> supplies) {  
        this.supplies = supplies;  
    }  
    List<Supply> getSupplies() {  
        return supplies;  
    }  
}
```

```
class Inventory {  
    private final List<Supply> supplies;  
    Inventory(List<Supply> supplies) {  
        this.supplies = new ArrayList<>(supplies);  
    }  
    List<Supply> getSupplies() {  
        return Collections.unmodifiableList(supplies);  
    }  
}
```

Kategorie: Namen

Avoid Meaningless Terms

```
class MainSpaceShipManager {  
    AbstractRocketPropulsionEngine abstractRocketPropulsionEngine;  
    INavigationController navigationController;  
    boolean turboEnabledFlag;  
  
    void navigateSpaceShipTo(PlanetInfo planetInfo) {  
        RouteData data = navigationController.calculateRouteData(planetInfo);  
        LogHelper.logRouteData(data);  
        abstractRocketPropulsionEngine.invokeTask(data, turboEnabledFlag);  
    }  
}
```

```
class SpaceShip {  
    Engine engine;  
    Navigator navigator;  
    boolean turboEnabled;  
  
    void navigateTo(Planet destination) {  
        Route route = navigator.calculateRouteTo(destination);  
        Logger.log(route);  
        engine.follow(route, turboEnabled);  
    }  
}
```

Use Domain Terminology

```
class Person {
    String lastName;
    String role;
    int travels;
    LocalDate employedSince;

    String serializeAsLine() {
        return String.join(",",
            Arrays.asList(lastName,
                role,
                String.valueOf(travels),
                String.valueOf(employedSince))
        );
    }
}
```

```
class Astronaut {
    String tagName;
    String rank;
    int missions;
    LocalDate activeDutySince;

    String toCSV() {
        return String.join(",",
            Arrays.asList(tagName,
                rank,
                String.valueOf(missions),
                String.valueOf(activeDutySince))
        );
    }
}
```

Kategorie: Streams

Favor Method References Over Lambdas

```
class Inventory {  
    List<Supply> supplies = new ArrayList<>();  
  
    long countDifferentKinds() {  
        return supplies.stream()  
            .filter(supply -> !supply.isContaminated())  
            .map(supply -> supply.getName())  
            .distinct()  
            .count();  
    }  
}
```

```
class Inventory {  
    List<Supply> supplies = new ArrayList<>();  
  
    long countDifferentKinds() {  
        return supplies.stream()  
            .filter(Supply::isUncontaminated)  
            .map(Supply::getName)  
            .distinct()  
            .count();  
    }  
}
```

Kategorie: Echte Welt

Know Your Falsehoods

```
class NameTag {  
    final String name;  
  
    NameTag(String fullName) {  
        this.name = parse(fullName).toUpperCase();  
    }  
  
    String parse(String fullName) {  
        String[] components = fullName.split("[,| ]");  
        if (components == null || components.length < 2) {  
            return fullName;  
        }  
        if (fullName.contains(",")) {  
            return components[0];  
        } else {  
            return components[components.length - 1];  
        }  
    }  
}
```

```
class NameTag {  
    final String name;  
  
    NameTag(String name) {  
        Objects.requireNonNull(name);  
        this.name = name;  
    }  
}
```

Angela Merkel

Neil Alden Armstrong

Edwin Eugene Aldrin, Jr.

費俊龍


Braucht doch keiner!

**Es gibt doch automatisierte
statische Codeanalyse!**

The
Pragmatic
Programmers

Java by Comparison

Become a Java Craftsman
in 70 Examples

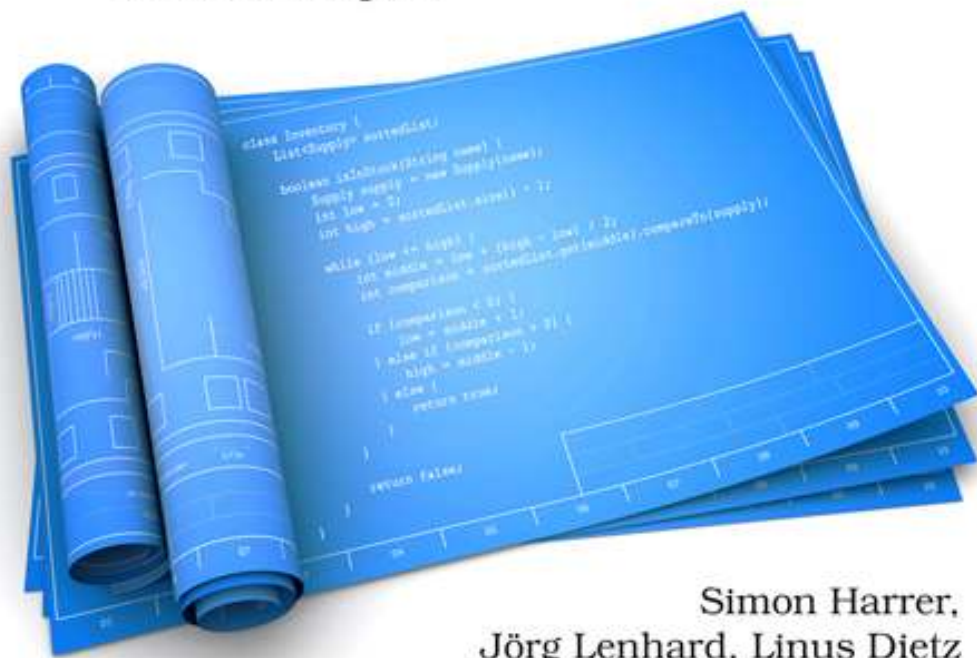

Simon Harrer,
Jörg Lenhard, Linus Dietz
Foreword by Venkat Subramaniam
Edited by Andrea Stewart

Danke fürs Kommen!

<Werbung>Signierte Exemplare für nur 25,00€ statt 32,65€. Aber nur solange der Vorrat reicht. </Werbung>

Dr. **Simon** Harrer

 [simonharrer](#)

simon.harrer@innoq.com

Linus Dietz

 [Lynnyus](#)

linus.dietz@tum.de

INNOQ

